

ENTRYDEFENDER™ DOOR

MODEL CPED0101 (05, 15, 60)




MEASURE THE HEIGHT AND WIDTH OF THE OPENING


COMPONENT DIMENSIONS

3'	19"	19"	9-5/8" to 11"	6-5/8" to 8"	14" to 15"
4'	20"	20"			
5'	21"	21"			
6'	22"	22"			
7'	22"	22"			
8'	23"	23"			
9'	24"	24"			
10'	24"	24"			
11'	25"	25"			
12'	26"	26"			
13'	26"	26"			
14'	28"	28"			
15'	29"	29"			
16'	29"	29"			
Opening Height (Feet)	A	B	C (Operator)	D (Adjustor)	E

The maximum size available will vary slightly based on the wall construction. If the wall construction is steel, the maximum size is 13' 11-1/4" wide by 16' high. If the wall construction is concrete, the maximum size is 13' 8-3/4" wide by 16' high.

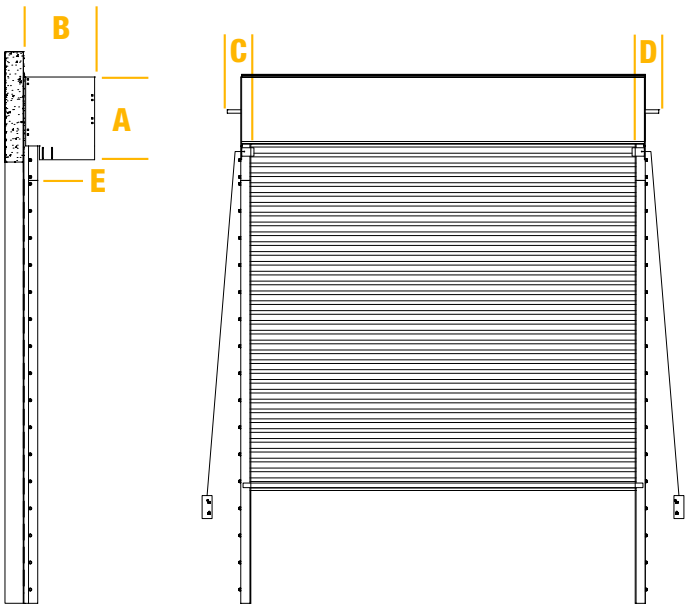

SLAT CROSS-SECTION



The details and dimensions on this sheet are provided as a rough guide for planning purposes.


DEFENDER SERIES

ENTRYDEFENDER™ DOOR

GUIDE CONSTRUCTION OPTIONS


E GUIDE

Typically used with steel jambs with a minimum yield strength of 36 ksi.

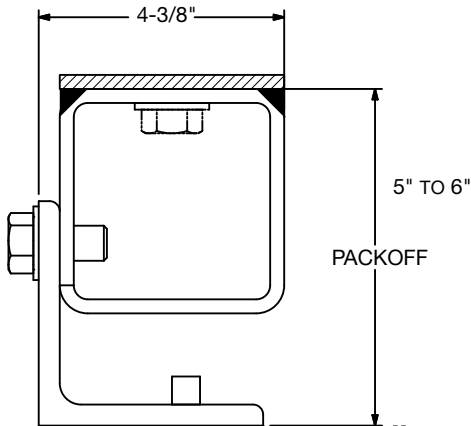


E GUIDE

Typically used with a concrete wall construction that is a minimum thickness of 8".

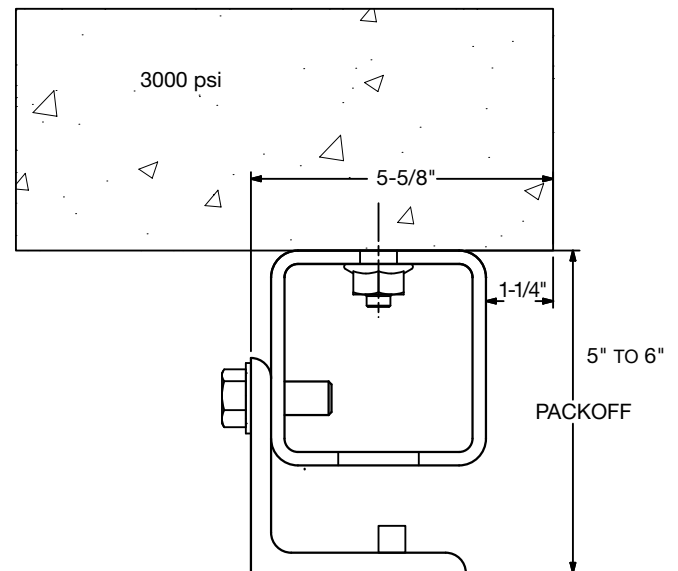

BOTTOM BAR

Heavy duty 12 gauge bottom bar with an 11 gauge reinforcement tube.

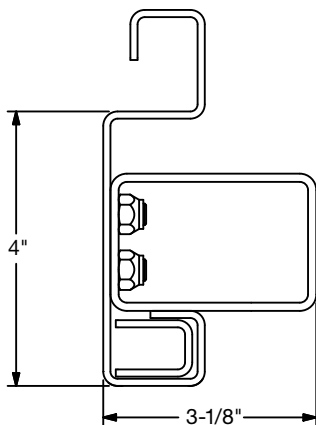

PLEASE NOTE:

No certified rolling door can be mounted to hollow or filled CMU.

The details and dimensions on this sheet are provided as a rough guide for planning purposes.

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2024 Clopay Corporation. All rights reserved.



CMDC-ENTRYDEFENDERTD-24