



SMOKESHIELD™ ELEVATOR



MODEL CERF10

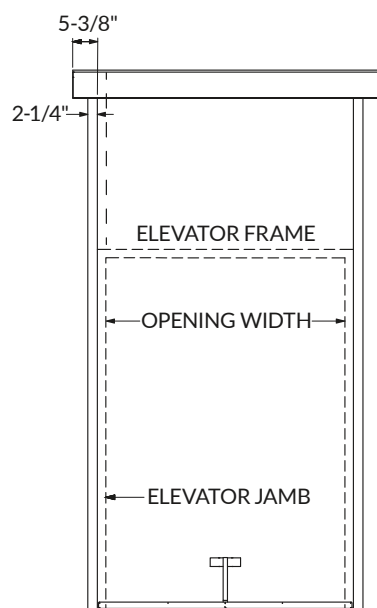

BELOW CEILING

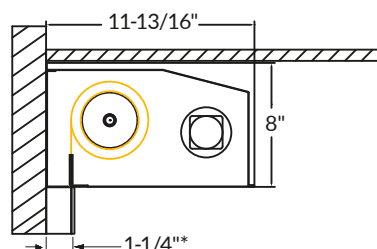

FLUSH WITH CEILING

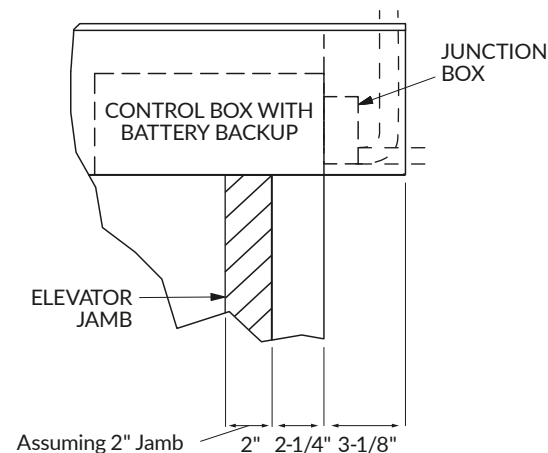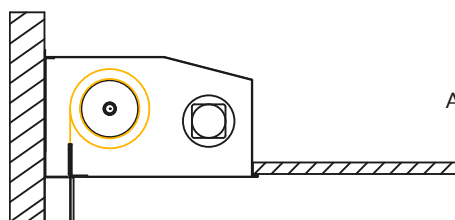

*If a packoff is needed for installation, this dimension will increase.


MAX SIZES

WIDTH – 12 FT
HEIGHT – 12 FT

Assumes average
elevator jamb width of 2"

STRUCTURAL INFO

1. Vertical jambs support the weight of the headbox assembly containing the barrel, curtain, motor and controller.
2. Headbox attached to wall at these 2 points.

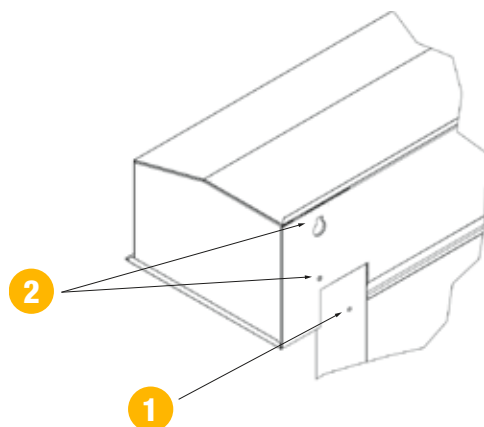

Complies with:

- IBC 2003 – PRESENT
- ICC-ES Report AC – 77


Listed:

- UL 1784
- UL 325
- UL 864
- ASTM E84
- California State Fire Marshal


NOTE: This design requires back-to-back studs adjacent to vertical elevator jambs.

STANDARD GUIDE OPTIONS - INTERIOR MOUNT ONLY


OFFSET GUIDE (EXPOSED)

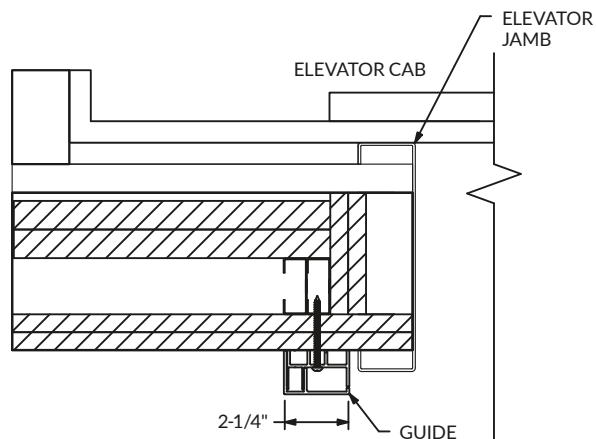


OFFSET GUIDE (UNDER FASCIA)

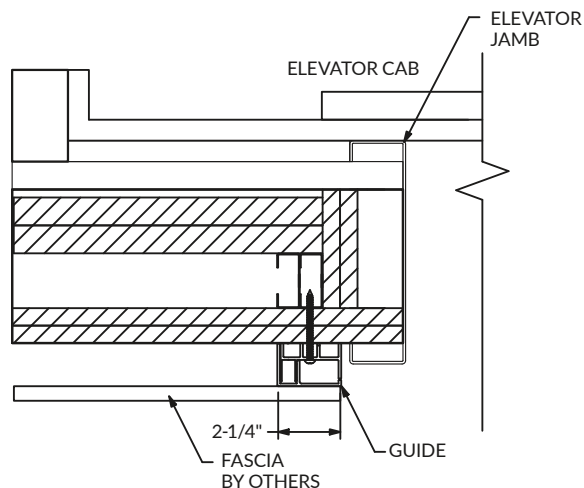

OVERFRAME (EXPOSED)

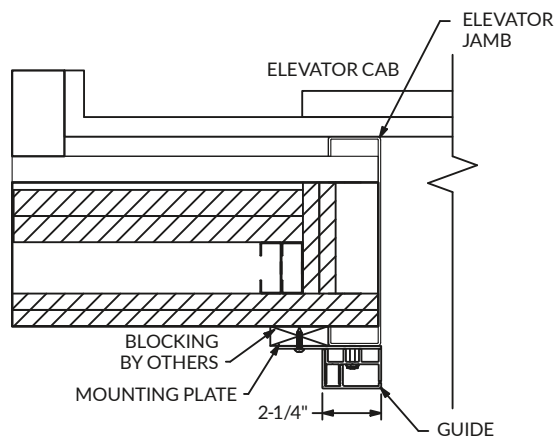

OVERFRAME (UNDER FASCIA)

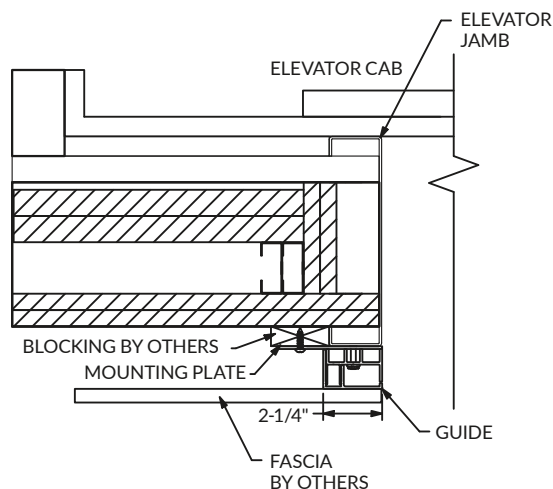

Please Note: Curtains exceeding 70" may require vertical seaming.

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2026 Clopay Corporation. All rights reserved.

