

DEFENDER SERIES

STORMDEFENDER® DOOR

CLOPAY COMMERCIAL – MODELS CPSD361, CPRSD361 (FIRE-RATED)



Model CPSD361 Door

SAFE ROOM INNOVATION ENABLES OPEN, AIRY DESIGN

INVISIBLE PROTECTION = DESIGN FREEDOM

The StormDefender® door is big on security and design. How? By being invisible until called into service. The sleek construction allows for virtually undetectable embedment into precast concrete, creating minimal protrusion into the space. In addition, the coil may be hidden above a finished ceiling or into a soffit.

This invisibility allows design freedom – a single door can cover multiple openings or even banks of windows to maximize natural light. With StormDefender® doors, typical safe room spaces – like cafeterias, classroom pods and gymnasiums – can be open and airy instead of dark and claustrophobic. When a storm is imminent, the StormDefender door deploys, automatically turning an open space into an ICC 500/FEMA P-361 rated safe room to protect occupants from harsh winds and deadly projectiles. After the event, the door simply disappears back into the structure.

clipaycommercial.com

MEETING THE STANDARDS

The StormDefender® is designed specifically with life safety in mind for safe room protection against tornadoes and hurricanes. Available in fire-rated and non fire-rated models, the door is tested and certified to stringent ICC 500-2023 and FEMA P-361, Third Edition code standards.

BUILT FOR PROTECTION


The StormDefender® utilizes our award-winning AlarmGard system with fail-safe operation. It can be connected directly to the building alarm system – deploying the doors upon activation. In the event a storm knocks out power, the door will automatically close to eliminate one more “to-do”. The heavy-duty slats are held in place with our patent pending curtain design keeping them in the guides even in the strongest of winds. In addition, sound deadening endlocks reduce noise during operation.

STORMDEFENDER® DOOR

STANDARD COMPONENT MATERIALS AND FINISHES

- 1. BRACKETS** – Steel with powder coated finish to match curtain. Bolted to guide assembly and support counter-balance shaft and curtain.
- 2. HOOD** – Galvanized steel color to match curtain.
- 3. HORN AND STROBE LIGHT** – Activates when door is operating.
- 4. PATENT PENDING WINDLOCKS** – Cut into the ends of each slat to engage in the windlock bar. Prevents the curtain from pulling out of the guides during high pressure events.

- MOTOR** – The optional AlarmGard® operator allows the door to be connected to a notification system or default to the secure/protected position under a power failure. Can be upgraded to the AlarmGard® Plus to include a handchain and battery backup.
- 5. CURTAIN** – Steel with SpectraShield® powder coat in gray as standard. 12 gauge, 4" face flat slat with integrated wind locks.
- 6. GUIDES** – Support the weight of the door. Steel with powder coated finish to match curtain.
- 7. BOTTOM BAR** – Steel with powder coating to match curtain. 12 gauge, 4" face bottom bar provides a uniform appearance with the rest of the curtain. A 12 gauge reinforcement channel is inserted into the bottom bar for additional strength. No additional locking required; once the door is closed it is secure.
- 8. SMOKE GASKET** – Available as standard on Model CPRSD361 (fire-rated) door.

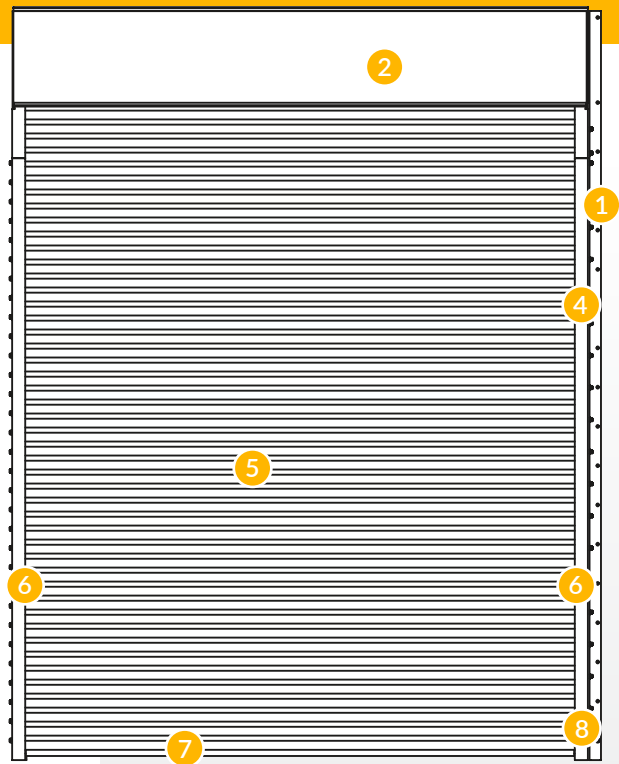

OPERATION AND STRUCTURAL REQUIREMENTS

Motor operation required.

The AlarmGard® Operator allows the door to be connected to a notification system. Upgrade to the AlarmGard® Plus to also include a handchain and battery backup. 4000PSI concrete, 1500 PSI grout filled CMU or 36KSI steel jamb construction is required. No additional header support is required unless hood supports are mandated by a larger opening width.

The optional EverGard™ Operator activates the battery backup in the absence of power, which can operate StormDefender up to 10 cycles over 48 hours. Contact factory for more details.

**STORMDEFENDER®
VS
STANDARD SLATS**



CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.

CERTIFICATIONS AND LISTINGS

- ICC 500-2023
- FEMA P-361
- Miami Dade
- Texas Department of Insurance (TDI)
- UL 10B – 3 hour fire rating*

*Model CPRSD361 (fire-rated) only

OPTIONAL FINISHES

- Stainless steel
- SpectraShield® Powder Coating in more than 180 colors
- AtmoShield™ textured powder coat in 11 colors



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.

