

STORMDEFENDER® DOOR

MODELS CPSD361, CPRSD361 (FIRE-RATED)

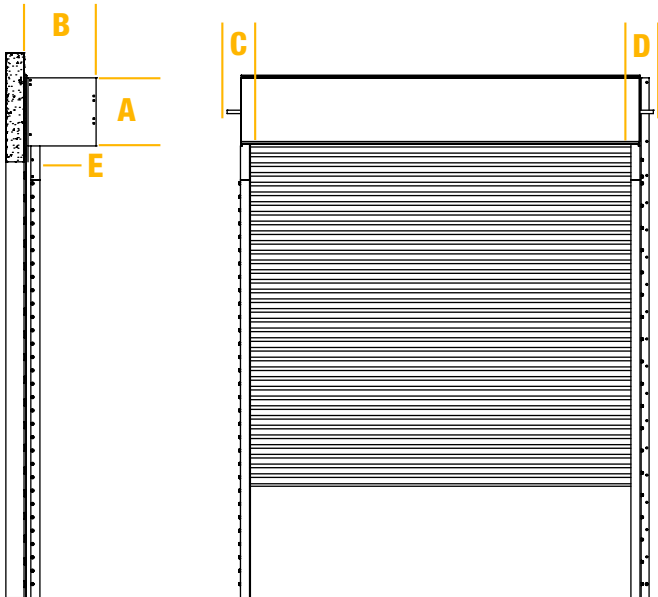


MEASURE THE HEIGHT AND WIDTH OF THE OPENING


COMPONENT DIMENSIONS

3'	19"	19"	9-5/8" to 11"	6-5/8" to 8"	5" to 7"
4'	20"	20"			
5'	21"	21"			
6'	22"	22"			
7'	22"	22"			
8'	23"	23"			
9'	24"	24"			
10'	24"	24"			
11'	25"	25"			
12'	26"	26"			
13'	26"	26"			
14'	28"	28"			
15'	29"	29"			
16'	29"	29"			
Opening Height (Feet)	A	B	C (Operator)	D (Adjustor)	E

Maximum width between 13'10" and 14' depending on configuration. Please contact the factory if maximum width required is more than 13'10" to ensure proper configuration. Maximum opening width for CMU Mounting is 12'6".



SLAT CROSS-SECTION

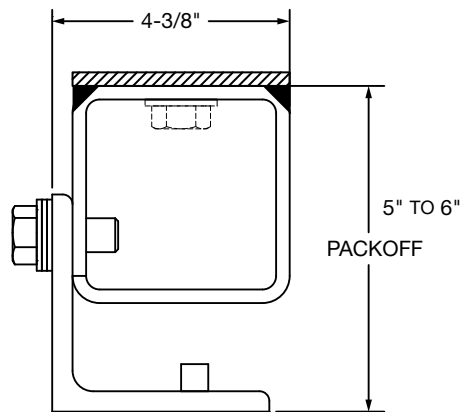


The details and dimensions on this sheet are provided as a rough guide for planning purposes.

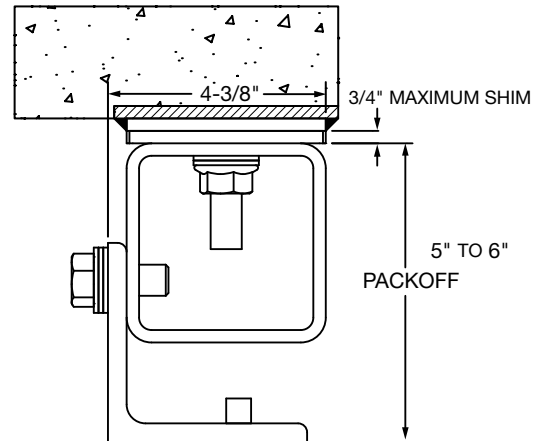
GUIDE CONSTRUCTION OPTIONS

E GUIDE

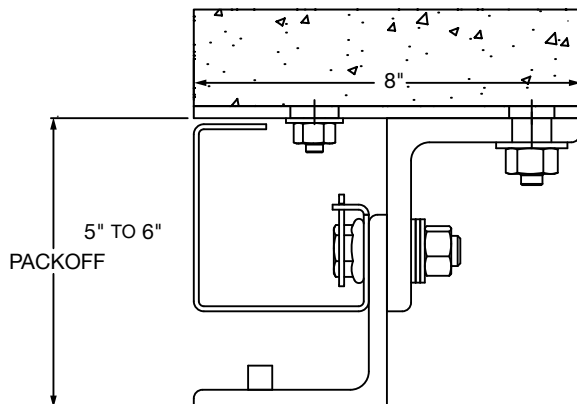
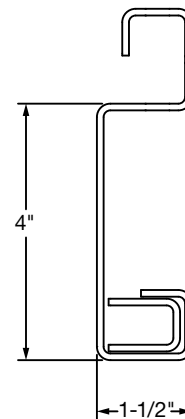
Typically used with steel jambs.

**E GUIDE WITH SHIMS**

Typically used with for uneven mounting surfaces, i.e. embedment plates.

**Z GUIDE**

Typically used with concrete wall construction.

**BOTTOM BAR****PLEASE NOTE:**

Solid 4,000 PSI concrete,
36 KSI steel jambs or
minimum 1,500 PSI
grouted concrete is required
depending on mounting style

The details and dimensions featured on this sheet are provided as a rough guide for planning purposes.

CUSTOM-DESIGNED SOLUTIONS

Contact our experienced Architectural Design Support Team for help in customizing our products to fit your specific application at www.architectdoorhelp.com.



For more information on these and other Clopay products, visit clopaycommercial.com. Architects and specifiers, visit architectdoorhelp.com.



©2024 Clopay Corporation. All rights reserved.

