

STANDARD-LIFT
FOLLOW-THE-ROOF TRACK



NOTE: MAX. PITCH AVAILABLE IS 12:12
OVER 12:12 USE VERTICAL-LIFT TRACK

HEADROOM REQUIREMENTS:

DOOR HEIGHT	2" TRACK	3" TRACK
UP TO 10'0"	16"	18"
10'3" - 18'0"	16"	18"
18'3" AND UP	18 3/4"	19 3/4"

2" ADDITIONAL HEADROOM REQUIRED FOR 6" I.D. SPRINGS
4" ADDITIONAL HEADROOM REQUIRED FOR TROLLEY OPERATORS
12" ADDITIONAL HEADROOM REQUIRED FOR DOUBLE SHAFTS

NOTE:
SPRING SIZE AND CONFIGURATION INDIVIDUALLY CALCULATED
TO COUNTERBALANCE DOOR LOAD. AN EXACT SPRING LAYOUT
CAN BE FURNISHED UPON APPROVAL OF BID. SOME DOORS
MAY REQUIRE 6" SPRINGS OR DOUBLE SHAFTS.

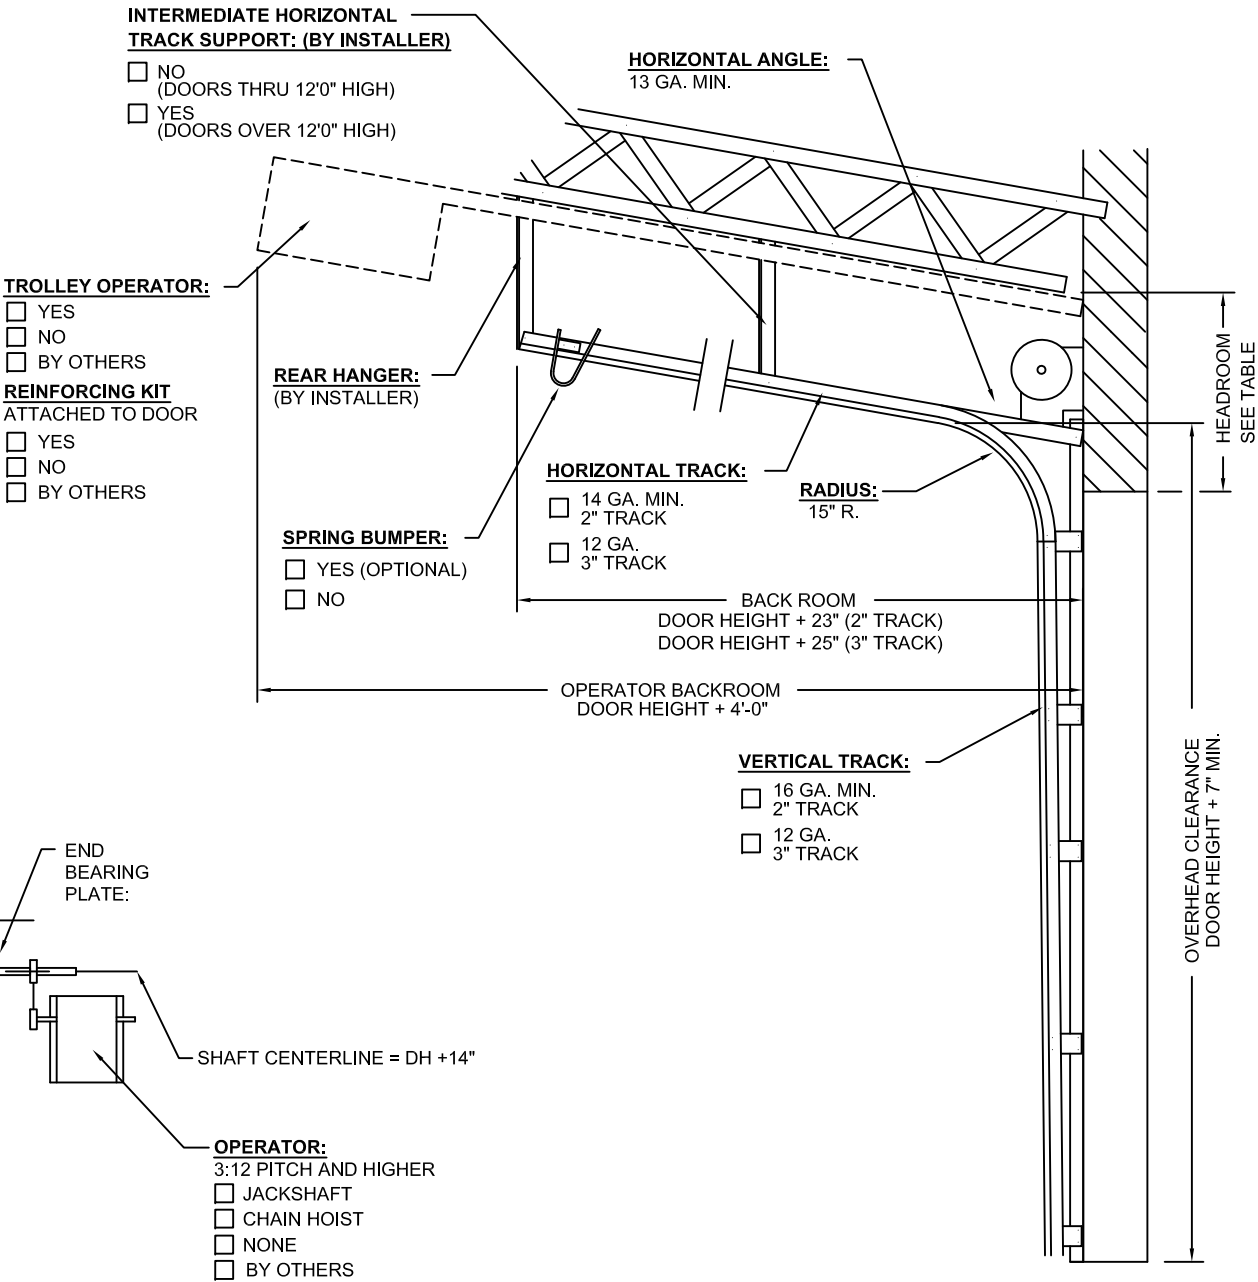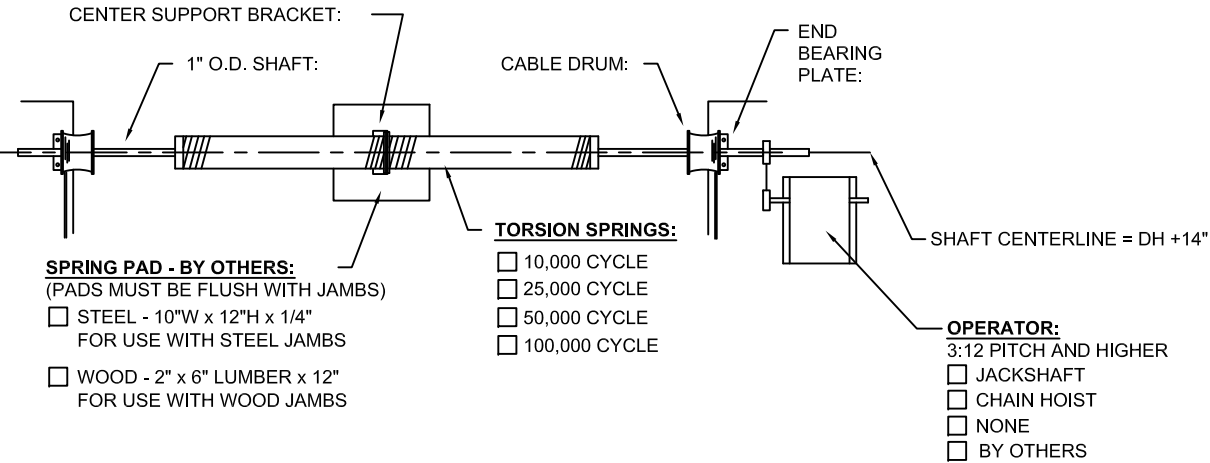

CUST: _____

JOB: _____

ARCH: _____

CONT: _____

STANDARD LIFT
FOLLOW-THE-ROOF

TRACK SIZE: _____

OPENING SIZE: _____' _____" W x _____' _____" H

DOOR SIZE: _____' _____" W x _____' _____" H

OPERATOR MODEL #: _____

OPERATOR BACKROOM: _____

BACK ROOM: _____

OVERHEAD CLEARANCE: _____

AVAILABLE HEADROOM: _____

HEADROOM REQUIREMENT: _____

SHEET 'T-4'

DATE: _____

BID #: _____

PAGE _____ of _____