

HIGH-LIFT FOLLOW-THE-ROOF TRACK

NOTE: MAX. PITCH AVAILABLE IS 12:12
 OVER 12:12 USE VERTICAL-LIFT TRACK
☐ 5° BREAKAWAY
☐ STRAIGHT INCLINE (OPTIONAL) *


* STRAIGHT INCLINE TRACK LIMITATIONS:

DOOR HEIGHT	MAX. HI-LIFT
THRU 14'0"	54"
@ 15'0"	43"
@ 16'0"	31"

HEADROOM REQUIREMENTS:
 MINIMUM HEADROOM = HI-LIFT + 12"
 12" ADDITIONAL FOR DOUBLE SHAFTS


MAX. AVAILABLE HI-LIFT:
 (BREAKAWAY TRACK)
 MAXIMUM HI-LIFT =
 FLOOR TO CEILING - (DOOR HEIGHT + 12")
 HI-LIFT MAY NOT EXCEED THE DOOR HEIGHT - 24"
 OR EXCEED 162" (13'6")

NOTE:
 SPRING SIZE AND CONFIGURATION INDIVIDUALLY CALCULATED
 TO COUNTERBALANCE DOOR LOAD. AN EXACT SPRING LAYOUT
 CAN BE FURNISHED UPON APPROVAL OF BID. SOME DOORS
 MAY REQUIRE 6" SPRINGS OR DOUBLE SHAFTS.

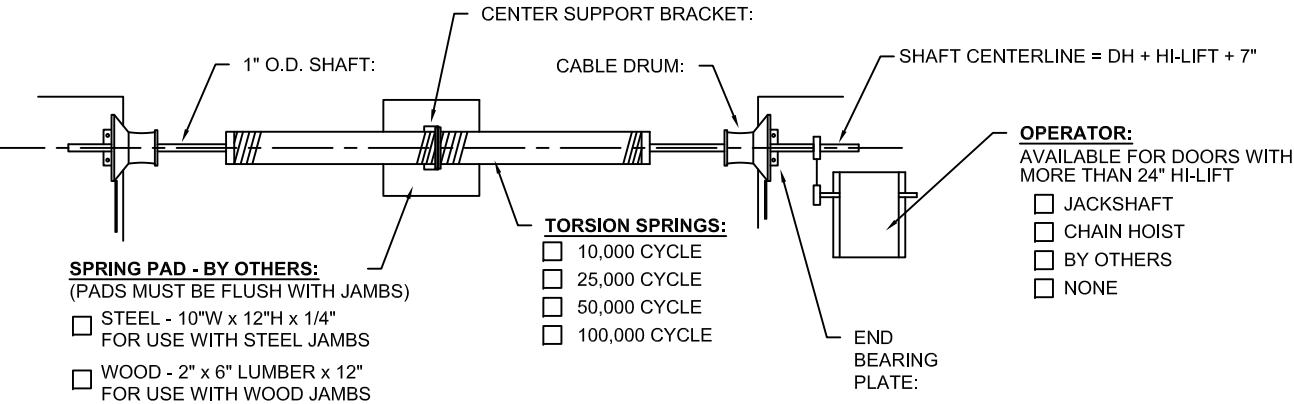

INTERMEDIATE HORIZONTAL TRACK SUPPORT: (BY INSTALLER)

- ☐ NO - (HORIZONTAL TRACK LENGTH UP THRU 13'0")
- ☐ YES - (HORIZONTAL TRACK LENGTH OVER 13'0")

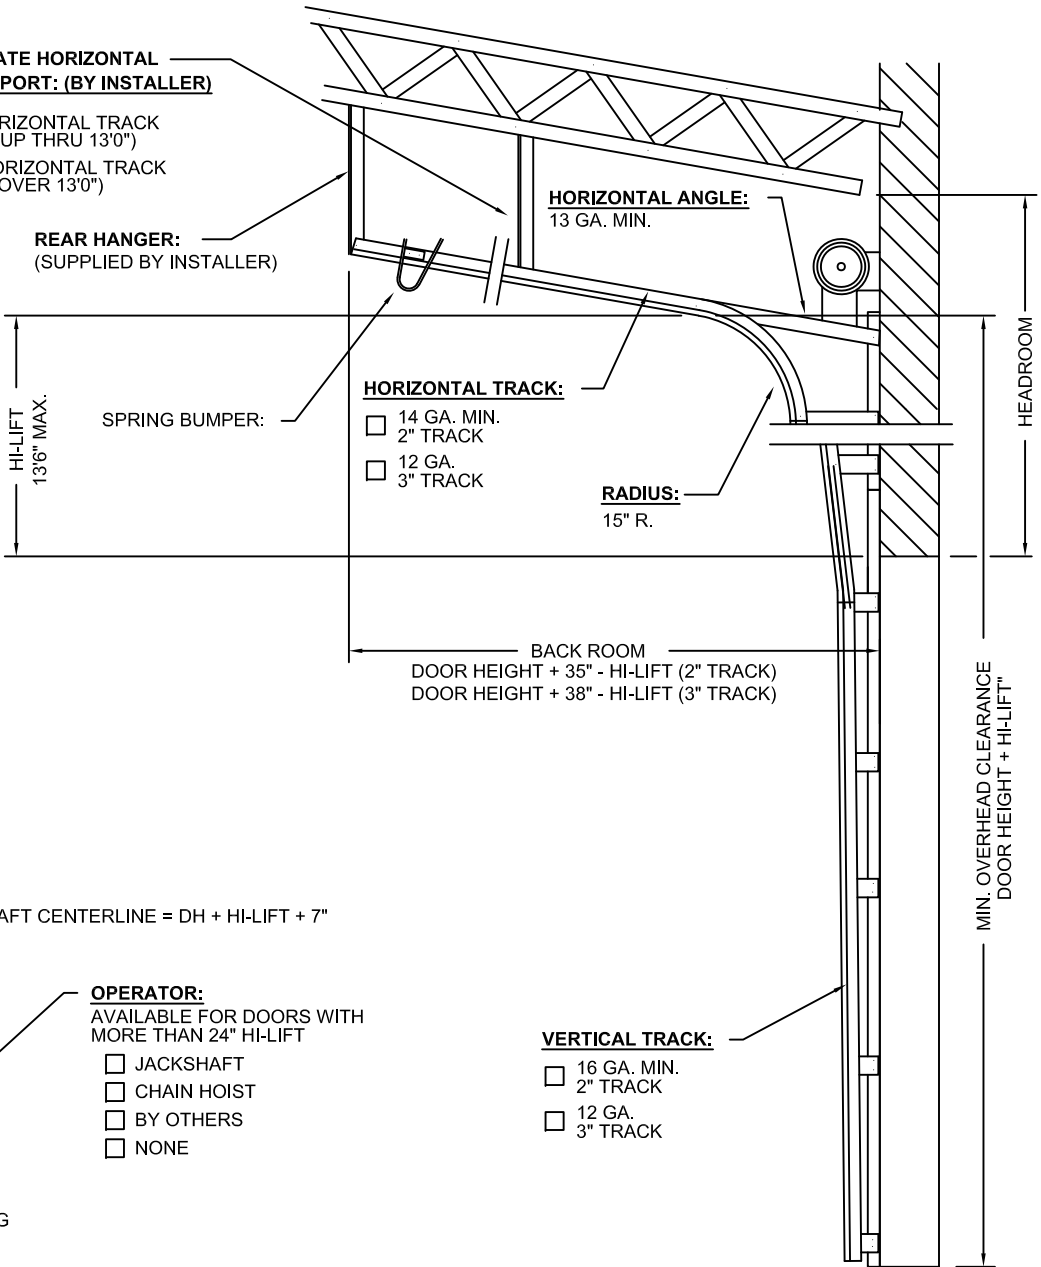

CUST:	HIGH LIFT FOLLOW-THE-ROOF	TRACK SIZE:	OPERATOR MODEL #:	OVERHEAD CLEARANCE:	SHEET 'T-6' DATE: _____ BID #: _____ PAGE ____ of ____
JOB:	OPENING SIZE: ' " W x ' " H		OPERATOR BACKROOM:	AVAILABLE HEADROOM:	
ARCH:	DOOR SIZE: ' " W x ' " H		BACK ROOM:	HEADROOM REQUIREMENT:	
CONT:					